



HP Envy m6-k022dx Lower Case Replacement

Guide for unscrewing the back plate of the HP Envy laptop.

Written By: Jibreel Campbell



INTRODUCTION

To gain access to the inside of the laptop, you will first need to remove the back plate. Make sure you have a PH1 size screwdriver to unscrew all of the screws.



TOOLS:

- Philips Head Screwdriver: Size PH1 (1)
-

Step 1 — Lower Case




- There are 12 phillips head screws which need to be unscrewed before removing the backplate of the laptop.

Step 2



- Next, use a size PH1 Philips head screw driver to remove the screws.

Step 3

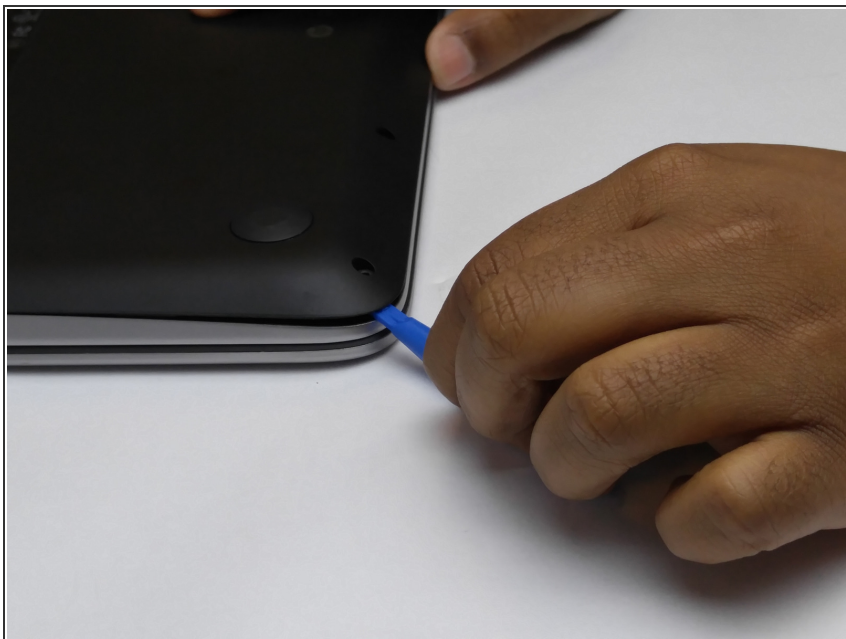

- Then, use a prying tool to help uncouple the backplate.

Step 4



- Finally, use both hands to lift up and take off the back plate of the computer.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-24 02:20:32 PM.